

25X1

25X1

CLASSIFICATION		SECRET	SECURITY INFORMATION		CENTRAL INTELLIGENCE AGENCY		INFORMATION REPORT		REPORT NO.	
COUNTRY	Poland									
SUBJECT	Cockpit Layout and Operation of the MIG-15 (RD-45 powered)									
PLACE ACQUIRED				25X1					DATE DISTR.	1 FEB 54
DATE ACQUIRED BY SOURCE				25X1					NO. OF PAGES	3
DATE OF INFORMATION									NO. OF ENCLS. (LISTED BELOW)	
										SUPPLEMENT TO REPORT NO.
										25X1


THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES, WITHIN THE MEANING OF TITLE 18, SECTIONS 793 AND 794, OF THE U.S. CODE, AS AMENDED. ITS TRANSMISSION OR REPRODUCTION OF ITS CONTENTS TO OR RECEIPT BY AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW. THE REPRODUCTION OF THIS FORM IS PROHIBITED.

THIS IS UNEVALUATED INFORMATION

25X1

SECRET/SECURITY INFORMATION

-2-

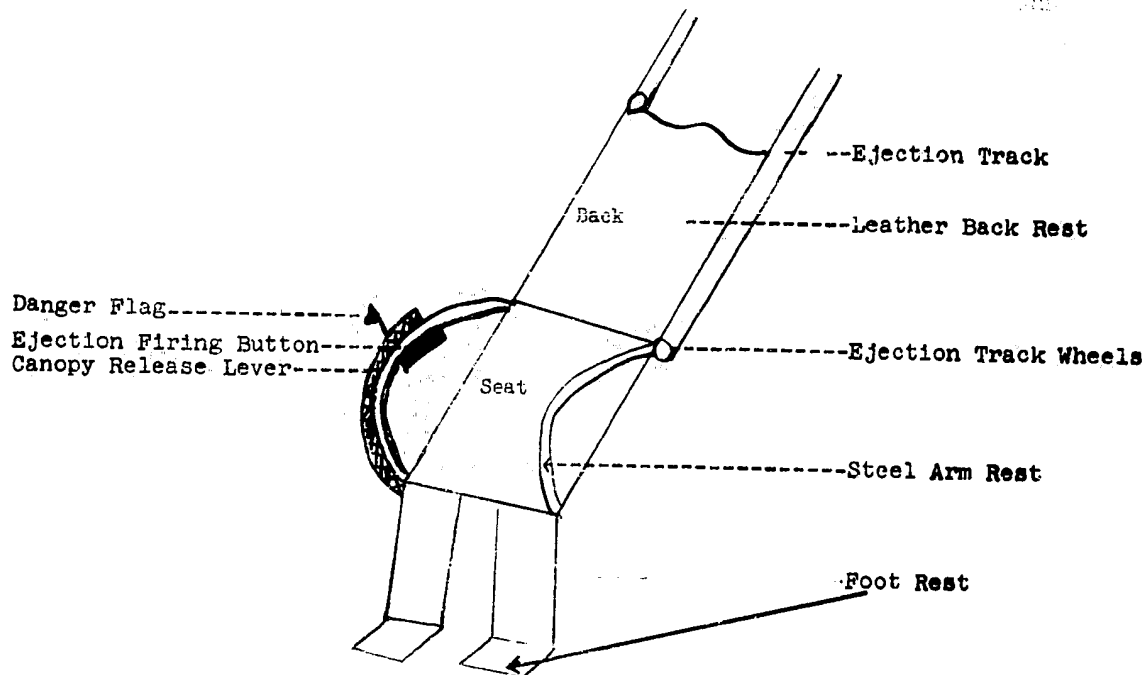

FRONT VIEW

- Q. Does the seat have foot stirrups, arm, and head rests?
- A. No foot stirrups, but there are arm and head rests.
- Q. Is the seat adjustable vertically and horizontally?
- A. The seat is adjustable vertically only.
5. Q. Is the airplane serviced with air before every flight?
- A. The plane is serviced with air before every flight; 120 minimum atmosphere pressure before take-off.
6. Q. Where in the airplane is the battery located?
- A. The battery is in the nose of the airplane, directly in front of the pilot.
7. Q. Give a complete and detailed description of the preflight inspection.
- A. A general inspection is made by the pilot. Detailed inspection is made by mechanics. In the pilot's general inspection, all vents and air holes must be inspected; secondly the wheels are inspected; lastly the pilot checks the cabin and instrument panel.
8. Q. Give locations and means of opening all inspection doors.
- A. Inspection doors are opened with a screw driver.

25X1

25X1

SECRET/SECURITY INFORMATION

25X1

SECRET/SECURITY INFORMATION

-3-

9. Q. Does the air pressure gauge read 8 atm or 8 x 10 atm when the airplane is serviced with air?
- A. It reads between 120 - 150 atmospheres.
10. Q. Is the starting button pushed with the thumb or little finger?
- A. There is no difference whether the thumb or little finger is used when pushing the starting button.
11. Q. Indicate on a sketch which buttons are depressed prior to starting.
- A. ☒ From an available sketch source was unable to state which buttons are depressed prior to starting. Source claims that location of buttons to be depressed before starting varies in each plane.
12. Q. During engine run-up and at eight thousand revolutions per minute how is the generator checked? What are the meter readings? What should the oil pressure be? What should the fuel pressure be?
- A. If the voltage meter reads between 26 and 28, the generator is considered to be functioning properly. Oil pressure reading on the RD-45 should be between 3 to 5 atmospheres with 6 atmospheres as maximum. According to instructions, fuel pressure should be 72 atmospheres, however, in practice 50 to 60 atmospheres is acceptable.
13. Q. Are you certain that the gear selector valve handle is mounted below the instrument panel?
- A. Yes, that is the correct location.
14. Q. Describe in detail the cart used to supply power for starting the aircraft's turbine.
- A. The old-type cart was a two-wheeled cart capable of supplying power for one plane. The new type is a complete truck capable of servicing two planes simultaneously.
15. Q. It is mentioned that fuel is drained prior to starting the engine. To do this is it necessary to open the doors or remove the cover plates which are located to the right and left of the engine on the underside of the fuselage?
- A. I do not know.
16. Q. Describe the truck which was used to transport the disassembled airplane.
- A. A four-wheeled flat cart. It is attached to a truck and pulled away. The fuselage is placed on the cart and secured to the cart with leather straps. The cart can be elevated or lowered to the desired height.
17. Q. To what static height is the main shock strut inflated?
- A. I do not know.

-end-

461.11	55H
464.11	55H
464.11	55H

SECRET/SECURITY INFORMATION